Engineering Release Matrix (EMR)	Location	Change description	P/A:	Document variant status
		Ordered Written Orderline	D: 1 . 2 . main	RELEASED
A-40116		SEE ECN	Date 03-04-16	Modification count

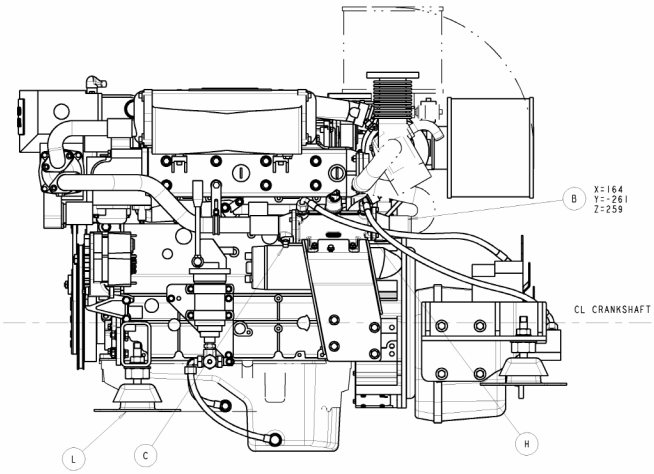

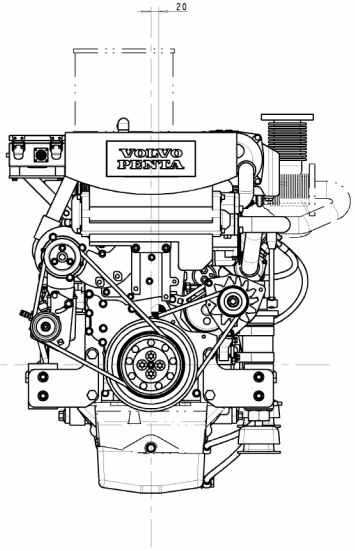

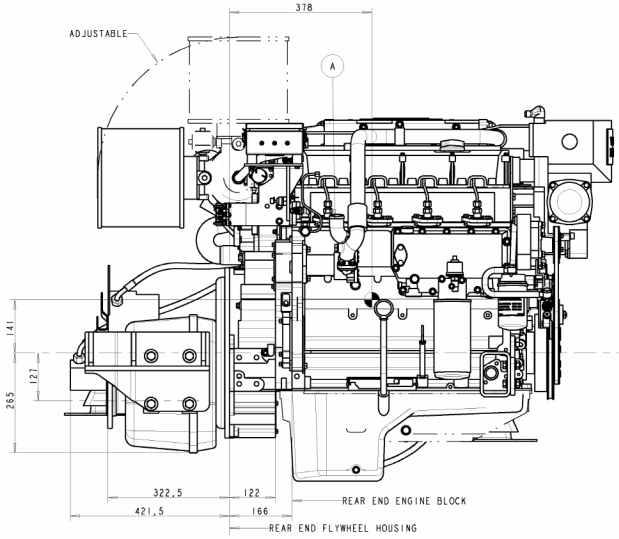



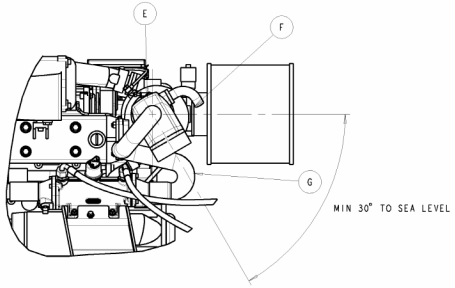



APPLIES WET EXHAUST ELBOW ONLY

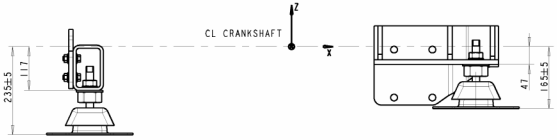

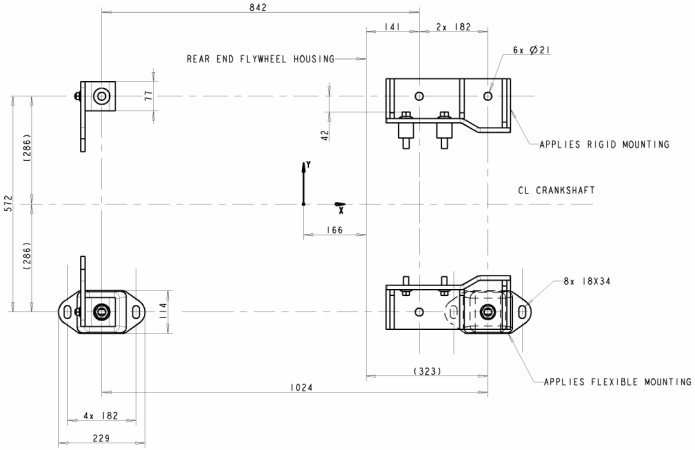

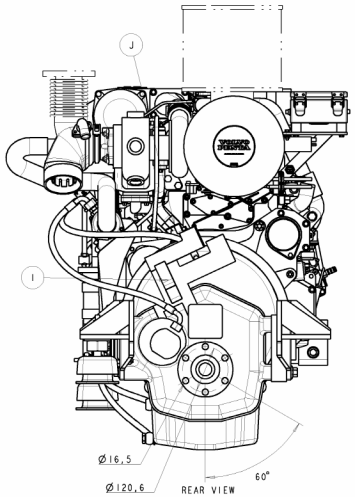

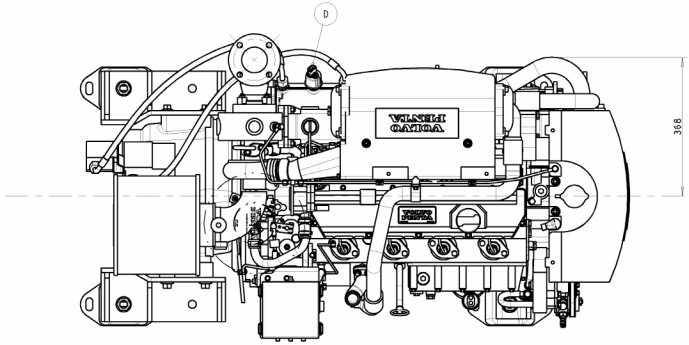

SCALE 1:5

- (A) SEA WATER INLET
- (B) SEA WATER OUTLET (APPLIES DRY EXHAUST ELBOW)
- (C) ANODE
- (D) PRESSURE SENDER REVERSE GEAR (OPTION)
- (E) WET EXHAUST ELBOW FOR 4" HOSE (OPTION)
- (F) BYPASS FLOW FOR HOSE Ø25 MM
- (G) HOSE BETWEEN OILCOOLER AND WET EXHAUST ELBOW
- (H) SEA WATER DRAIN
- (I) CONNECTION 33-CABLE FOR REVERSE GEAR
- (J) CONNECTION SLIP VALVE FOR 33-CABLE (OPTION)
- (K) PROP. SHAFT FLANGE, MAX Ø70 MM (OPTION)
- (L) RUBBER MOUNTING (OPTION)

DRY MASS APPROX. 620 KG

CONSEQUENCE CLASS [4] APPLIES TO PROPERTIES NOT MARKED

CENTER OF GRAVITY

FOR OTHER DIMENSIONS, SEE FOLLOWING DRAWINGS:
3590788, D5A TA
3590790, D5A T

The copying, distribution and utilization of this document as well as the communication of its contents to others without expressed authorization is prohibited. Offenders will be held liable for payment of damages. All rights reserved in the event of the grant of patent, utility model or ornamental design registration

SYMBOLS, DESIGNATIONS AND GENERAL DRAWING METHODS STD 5625.501

Document title
INSTALLATION DRAWING
ENGINE D5A T/TA, ZF220
HE-VERSION

Document type

Owner domain Document prefix

VOLVO PENTA

Document No	Item index	Sheet No	
3590743	02	1(1)	